

# KINEDYNE<sup>®</sup> LIFTING SLINGS

## TYPE 4 - TWISTED EYE-TO-EYE SLINGS

ENGINEERED TO BE TOUGH,  
FLEXIBLE, SECURE AND  
LIGHTWEIGHT.




Meets or exceeds:  
OSHA, ASME B30.9 and WSTDA  
Standards and Regulations

### KEY FEATURES:

- « Eye turned/twisted 90 degrees for smoother Choker hitch and better basket hitch fit
- « Flexible and Lightweight
- « 2-Ply polyester for reduced stretch, increased Strength and moisture and abrasion resistant
- « Available in 1" and 2"

### RATED FOR:

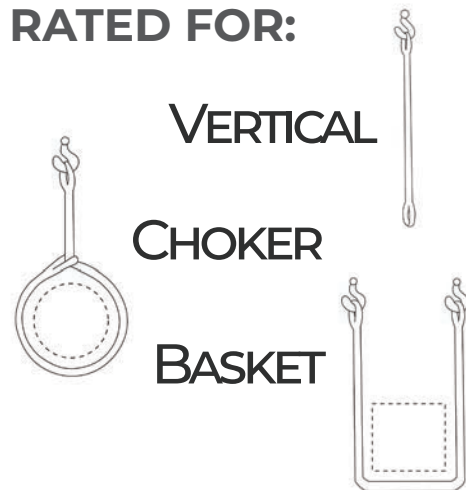

#### Customer Service - United States

Phone: (800) 848-6057  
E-mail: [customerservice@kinedyne.com](mailto:customerservice@kinedyne.com)

3040 US Highway 22 West Suite 150  
Branchburg, NJ 08876

#### Customer Service - Canada

Phone: (800) 268-3530  
E-mail: [orderdesk@kinedyne.com](mailto:orderdesk@kinedyne.com)

10 Maybrook Drive  
Toronto, Ontario M1V 4B6



# TYPE 4 - TWISTED EYE-TO-EYE SLINGS

## COMPLETE LINE OF KINEDYNE LIFTING SLINGS

Product Number	Width of Web Sling (inches)	Length of Web Sling (feet)	Diameter of Sling Eye	Weight of Assembly (lbs)	Weight of Assembly (kgs)	Working Load Limit Choker (lbs)	Working Load Limit - Vertical (lbs)	Working Load Limit - Vertical Basket (lbs)
EE2-9801X4-KIN	1"	4'	8.5"	0.7	0.318	2,500	3,200	6,400
EE2-9801X8-KIN	1"	8'	10"	1.2	0.544	2,500	3,200	6,400
EE2-9802X10-KIN	2"	10'	12"	3.2	1.452	5,000	6,400	12,800
EE2-9802X12-KIN	2"	12'	14"	3.6	1.633	5,000	6,400	12,800
EE2-9802X16-KIN	2"	16'	11"	4.5	2.041	5,000	6,400	12,800
EE2-9802X20-KIN	2"	20'	11"	5.9	2.676	5,000	6,400	12,800
EE2-9802X30-KIN	2"	30'	12"	8.3	3.765	5,000	6,400	12,800
EE2-9802X3-KIN	2"	3'	8.5"	1.2	0.544	5,000	6,400	12,800
EE2-9802X4-KIN	2"	4'	7"	1.5	0.68	5,000	6,400	12,800
EE2-9802X6-KIN	2"	6'	14"	2	0.907	5,000	6,400	12,800
EE2-9802X8-KIN	2"	8'	13"	2.5	1.134	5,000	6,400	12,800